



チャンネル SUS304・316・316L (熱間圧延品)

サイズ 厚さ×辺×高さ t×B×H	長さ mm	断面積 cm ²	kg/P		重心の位置 cm		断面二次 モーメント ⁽¹⁾ cm ⁴		断面二次半径 cm		断面係数 ⁽²⁾ cm ³		研磨
			SUS304	SUS316 SUS316L	Cx	Cy	Ix	Iy	ix	iy	Zx	Zy	
3×20×40	6,000	2.271	10.8		0	0.59	5.22	0.778	1.52	0.585	2.61	0.553	● 酸洗
3×25×50	6,000	2.871	13.7		0	0.72	10.6	1.6	1.92	0.746	4.26	0.895	● 酸洗
4×50×100	4,000	7.823	24.8		0	1.36	121.0	18.1	3.93	1.52	24.2	4.99	● 酸洗
	6,000	7.823	37.2	37.4	0	1.36	121.0	18.1	3.93	1.52	24.2	4.99	● 酸洗
5×40×80	4,000	7.548	23.9		0	1.16	71.1	10.9	3.07	1.20	17.8	3.83	● 酸洗
	6,000	7.548	35.9	36.1	0	1.16	71.1	10.9	3.07	1.20	17.8	3.83	● 酸洗
5×50×100	4,000	9.643	30.6		0	1.40	146.0	22.1	3.89	1.52	29.2	6.16	● 酸洗
	6,000	9.643	45.9	46.2	0	1.40	146.0	22.1	3.89	1.52	29.2	6.16	● 酸洗
6×50×100	4,000	11.37	36.0		0	1.43	168.0	25.3	3.85	1.49	33.7	7.09	● 酸洗
	6,000	11.37	54.1	54.4	0	1.43	168.0	25.3	3.85	1.49	33.7	7.09	● 酸洗
○ 6×60×120	6,000	13.79	65.4		0	1.69	300.0	45.6	4.66	1.82	50.0	10.6	● 酸洗
6×65×130	4,000	15.12	48.0		0	1.80	390.0	58.9	5.08	1.97	60.0	12.5	● 酸洗
	6,000	15.12	72.0	72.6	0	1.80	390.0	58.9	5.08	1.97	60.0	12.5	● 酸洗
6×75×150	4,000	17.52	55.6		0	2.05	609.0	92.3	5.89	2.30	81.2	16.9	● 酸洗
	6,000	17.52	83.4	84.0	0	2.05	609.0	92.3	5.89	2.30	81.2	16.9	● 酸洗
9×75×150	4,000	25.54	81.2		0	2.16	850.0	129.0	5.77	2.25	113.0	24.2	● 酸洗
	6,000	25.54	122	122	0	2.16	850.0	129.0	5.77	2.25	113.0	24.2	● 酸洗
○ 10×100×200	4,000	38.22	121.2		0	2.81	2310.0	351.0	7.77	3.03	231.0	48.8	● 酸洗
	6,000	38.22	182	183	0	2.81	2310.0	351.0	7.77	3.03	231.0	48.8	● 酸洗

○は溶接チャンネル



チャンネル

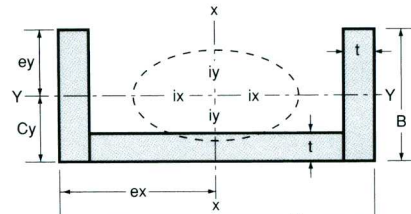

ワイドチャンネル

ワイドチャンネル SUS304 (溶接品)

サイズ 厚さ×辺×高さ t×B×H	長さ mm	断面積 cm ²	kg/P SUS304	重心の位置 cm		断面二次 モーメント ⁽¹⁾ cm ⁴		断面二次半径 cm		断面係数 ⁽²⁾ cm ³		研磨
				Cx	Cy	Ix	Iy	ix	iy	Zx	Zy	
6×65×220	6,000	20.52	97.8	0	1.41	1370	68.0	8.16	1.82	124	13.4	● 酸洗
6×65×230	6,000	21.12	100	0	1.37	1520	68.8	8.49	1.80	133	13.4	● 酸洗
6×75×250	6,000	23.60	112	0	1.59	2050	105	9.34	2.11	165	17.8	● 酸洗
9×75×250	6,000	34.65	165	0	1.71	2930	149	9.20	2.08	235	25.8	● 酸洗
9×90×250	6,000	37.35	178	0	2.18	3320	254	9.43	2.61	266	37.2	● 酸洗
9×90×300	6,000	41.85	199	0	1.99	5160	266	11.10	2.52	344	38.0	● 酸洗
9×100×300	6,000	43.63	206	0	2.36	5542	369	11.27	2.91	369	48.3	● 酸洗
10×100×250	6,000	43.25	206	0	2.61	3928	385	9.53	2.98	314	52.1	● 酸洗
10×90×300	6,000	46.22	220	0	2.02	5650	290	11.10	2.50	377	41.5	● 酸洗
10×100×300	6,000	48.22	229	0	2.33	6080	394	11.20	2.86	405	51.4	● 酸洗

寸法公差基準表

直角度	90° ±2°
曲り	3mm/1m以下
長さ公差	+40mm-0mm
断面二次モーメント	$I = ai^2$
断面二次半径	$i = \sqrt{I/a}$
断面係数	$Z = I/e$ (a=断面積)

※ワイドチャンネルは全て溶接品です。