


フォーミングチャンネル SUS304 未研磨品・外面HL、SPV仕上品

サイズ 厚さ×高さ×幅 t×H×B	長さ mm	R1	R2	断面積 cm ²	kg/P	断面二次モーメント cm ⁴		断面二次半径 cm		断面係数 cm ³		研磨
						Ix	Iy	ix	iy	Zx	Zy	
3×10×40	6,000	1.5	3.0	1.57	7.48	2.87	0.09	1.35	0.24	1.43	0.12	●●
3×20×40	6,000	1.5	3.0	2.19	11.0	5.01	0.79	1.51	0.59	2.50	0.55	●●
3×12.5×50	6,000	1.5	3.0	2.04	10.3	6.13	0.20	1.73	0.31	2.45	0.21	●●
3×25×50	6,000	1.5	3.0	2.79	13.8	10.28	1.52	1.92	0.75	4.11	0.89	●●
3×15×60	6,000	1.5	3.0	2.49	12.4	11.03	0.36	2.10	0.38	3.68	0.32	●●
3×30×60	6,000	1.5	3.0	3.39	16.7	18.35	2.83	2.33	0.91	6.12	1.31	●●
3×35×75	6,000	1.5	3.0	4.14	20.3	35.10	4.70	2.91	1.06	9.36	1.84	●●
3×20×80	6,000	1.5	3.0	3.39	16.7	27.53	0.93	2.85	0.52	6.88	0.60	●●
3×40×80	6,000	1.5	3.0	4.59	22.4	45.33	7.00	3.14	1.23	11.33	2.41	●●
3×25×100	6,000	1.5	3.0	4.29	21.0	55.42	1.91	3.59	0.67	11.08	0.97	●●
3×50×100	6,000	1.5	3.0	5.79	28.1	70.73	14.04	3.96	1.56	18.15	3.85	●●
3×60×120	6,000	1.5	3.0	6.99	33.8	159.37	24.69	4.77	1.88	26.56	5.61	●●
5×40×80	6,000	0	5.0	7.43	36.9	69.52	10.9	3.06	1.21	17.38	3.87	●●
5×50×100	6,000	0	5.0	9.43	46.4	141.5	22.2	3.87	1.53	28.3	6.21	●●
5×50×150	6,000	0	5.0	11.9	58.7	371.39	25.2	5.59	1.46	49.52	6.63	●●
6×30×60	6,000	0	6.0	6.38	32.5	31.08	4.95	2.21	0.88	10.36	2.44	●●
6×40×80	6,000	0	6.0	8.78	44.0	80.12	12.65	3.02	1.20	20.03	4.55	●●
6×50×100	6,000	0	6.0	11.18	55.4	164.49	25.86	3.84	1.52	32.9	7.33	●●
6×65×125	6,000	0	6.0	14.48	71.1	344.88	58.57	4.88	2.01	55.18	12.68	●●

寸法公差基準表

曲り	≤1mm/M
直角度	90°±1°

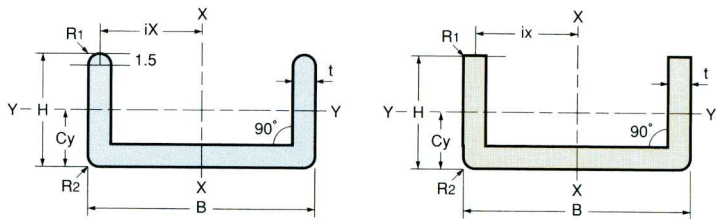

C形鋼 SUS304 未研磨品・外面HL、SPV仕上品

サイズ t×B×H×L	長さ mm	R1	R2	断面積 cm ²	kg/P	断面二次モーメント cm ⁴		断面二次半径 cm		断面係数 cm ³		研磨
						Ix	Iy	ix	iy	Zx	Zy	
2×40×20×8	6,000	2.0	2.0	1.73	8.28	4.09	0.91	1.54	0.73	2.04	0.73	●●
2×50×25×10	6,000	2.0	2.0	2.20	10.7	8.35	1.89	1.94	0.92	3.34	1.21	●●
2×52×20×8	6,000	2.0	2.0	1.97	9.48	7.69	1.00	1.98	0.71	2.96	0.75	●●
2×60×20×8	6,000	2.0	2.0	2.13	10.2	10.86	1.05	2.26	0.70	3.62	0.76	●●
2×70×20×8	6,000	2.0	2.0	2.33	11.2	15.8	1.10	2.61	0.69	4.51	0.77	●●
2×60×30×10	6,000	2.5	2.5	2.61	12.5	14.65	3.19	2.37	1.10	4.88	1.65	●●
2×80×40×14.5	6,000	2.5	2.5	3.59	17.2	36.35	8.29	3.18	1.52	9.09	3.26	●●
2×75×45×15	6,000	2.5	2.5	3.69	17.8	33.93	10.73	3.03	1.70	9.05	3.85	●●
2×100×50×19.5	6,000	2.5	2.5	4.59	22.0	73.09	17.24	3.99	1.94	14.62	5.50	●●
2×120×60×19.5	6,000	2.5	2.5	5.39	25.8	125.79	28.29	4.83	2.29	20.97	7.31	●●
4×60×30×10	6,000	4.0	4.0	4.82	22.9	24.92	4.98	2.27	1.01	8.30	2.58	●●
4×80×40×15	6,000	4.0	4.0	6.82	32.5	64.86	14.09	3.08	1.43	16.21	5.57	●●
4×100×50×20	6,000	4.0	4.0	8.82	42.0	133.61	30.38	3.39	1.85	26.72	9.72	●●

寸法公差基準表

曲り	≤1mm/M
直角度	90°±1°

